ONLINE ONLY AUCTION
Plant Closed

ERICKSON METALS CORPORATION
25 Knotter Drive
Cheshire, CT 06410

ALUMINUM COLD ROLLING & SLITTING FACILITY

DATE: Online Only Bidding Closes Tuesday, June 29th at 10:00 A.M. ET
INSPECTION:
Monday, June 28th from 9:00 A.M. – 4:00 P.M.

HIGHLIGHTS:

- INNOCENTI ZR23-25 Sendzimir 20HI Rolling Mill
- (6) Slitting Lines
- Annealing Furnaces
- Material Handling Equipment
- Trucks
- Machine & Hand Tools
- Air Compressors
- Inspection & Measurement Equipment
- Parts & Supplies
- Factory & Office Furniture, Fixtures & Equipment

In Conjunction With:

NATIONAL MACHINERY EXCHANGE, INC.

For complete catalog
crgllc.com
1.800.300.6852

CRG AUCTION

COIL PRO DOUBLE LOOP PRECISION SLITTING LINE

SENDZIMIR 20HI ROLLING MILL (SUBJECT TO PRIOR SALE)

BID ONLINE AT
BidSpotter.com

Auction Specialists • Appraisal Experts • Online or On-site
1654 King Street, Enfield, Connecticut 06082
(860) 623-9060 • (800) 300-6852 • Fax: (860) 623-9160
Bill Firestone, President

ROLLING MILL & SLITTING LINES

INNOCENTI ZR23-25 SENDZIMIR 20HI ROLLING MILL, max. width: 635mm (25"), min. width: 318mm (12.5"), max. mill speed: 400 MPM (1312 FPM), max. entry thickness: 3.0mm (.120"), min. exit thickness: .075mm (.003"), max. tension: 10,600 kg (23,360 pounds), closed loop coolant chilling system with filters, 1,000 HP DC mill motor, 800 HP DC winder motors, electronics and controls, massive inventory of spare rolls and spare parts included. ***(SUBJECT TO PRIOR SALE)***

2016 36" COIL PRO Double Loop Slitting Line, gauge range: 0.006"–0.050", width range: 0.375"–36", max. coil weight: 15,000-lb., entry/exit OD: 64", entry ID: 16"–20", exit ID: 6", 12", 16" and 20", arbor diameter 3.5", max. PIW: 425, tensile strength: 15–60 KPSI, shear strength: 11–45 KPSI, line speed: 750 FPM, line direction: R – L, line components: entry coil car, CPPO-15000 motorized mandrel payoff, with non-contact loop and edge guide system, AC vector drive system, pneumatic braking, ultrasonic (4) head loop sensor, traversing base with edge guide, hold down arm, paper winder, entry bridle table with carbide edge guides, CP35 slitter head, AC vector drive system, arbor diameter: 3.5", linear arbor movement, motorized arbor adjustment, knife diameter: 6.75"–7.5", spacer diameter: 4.5", exit pinch rolls: 3.5" diameter, (2) traversing scrap winders, 250-lb. capacity, (2) 2 HP variable speed motors, tension stand with overarm, number of overarms: (2), overarm tooling: 6" OD x 3" ID, pinch rollers: 3", felt wipe system, bladder system with IP control, movement type: linear elevating, max. linear travel: 72", max. horizontal travel: 84", CPW1-15000 mandrel recoiler, max. linear travel: 72", max. vertical travel: 28", linear motion, AC motor, rewind drive, AC vector drive system, hydraulic push-off, hold down arm, exit 15,000-lb. capacity, dual arm turnstile, extensive supply of tooling, and spare parts.

BID ONLINE AT *BidSpotter.com*

SENDZIMIR 20HI ROLLING MILL PAYOFF AND STRAIGHTENER

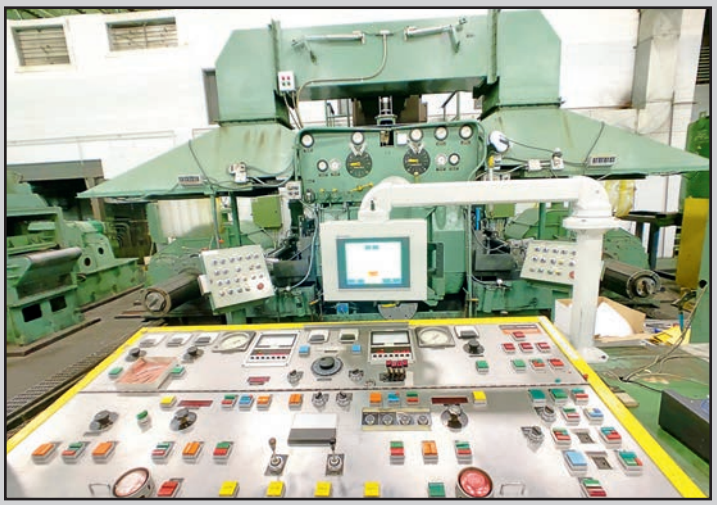

SENDZIMIR 20HI ROLLING MILL CONTROLS

18" ID CORE CUTTER

COIL PRO DOUBLE LOOP PRECISION SLITTING LINE

COIL PRO DOUBLE LOOP PRECISION SLITTING LINE

36" X .125" X 20,000-LB. LOOPCO/YODER SLITTING LINES

36" X .125" X 20,000-LB. LOOPCO/YODER SLITTING LINE

9.5" X 0.050" X 1,000-LB. WATERBURY FARREL PULL-THRU SLITTING LINE

ROLLING MILL & SLITTING LINES CONTINUED

36" LOOPCO/YODER Loop Slitting Line, max width: 36", thickness range: .125"–0.015", max. coil weight: 20,000, arbor diameter: 4", ID range: 16"/20", L-shaped traversing coil car, Yoder expanding mandrel payoff with hold down roll, Billy roll stand with peeler table, Yoder slitting head with pinch roll, 25 HP DC motor drive, 115/200 ROM, 240 volt, Yoder scrap winder, carry-over table, Loopco drag pad tension stand with Strilich pinch rolls, mandrel recoiler with hold down roll, 2-arm exit turnstile, complete assortment of tooling and spare parts.

24" WATERBURY FARREL Pull-Thru Slitting Line, max. width: 24", thickness range: 0.006"–0.090", max. weight: 10,000-lb. x 36" CMP mandrel uncoiler, 16"–20" ID, 60" OD, WF slitting head, 3.5" arbor, scrap winder, mandrel recoiler with solid drum, 6", 8", 12", 16" and 20" ID.

20" WATERBURY FARREL Pull-Thru Slitting Line, max. width: 20", thickness range: 0.006"–0.050", max. weight: 5,000-lb., 24" x 5,000-lb. Cooper Weymouth uncoiler, Waterbury Farrel slitting head, 2-5/8" Arbor, scrap winder, mandrel recoiler with solid drum, 6", 8", 12", 16" and 20" ID.

9.5" WATERBURY FARREL Pull-Thru Slitting Line, max. width: 9.5", thickness range: 0.006"–0.050", max. weight: 1,000-lb., stock reel, Waterbury Farrel slitting head, scrap winder, mandrel recoiler with solid drum, 6", 8", 12", 16" and 20" ID.

20" TISHKEN Pull-Thru Slitting Line, max. width: 20", thickness range: 0.006"–0.050", max. weight: 5,000-lb., 24" x 5,000-lb. Cooper Weymouth uncoiler, 16"–20" ID, Tishken slitting head, 3.5" arbor, 15 HP motor, scrap winder, exit stock reel, 6", 8", 12" and 16" ID.

DATE: Online Only Bidding Closes
Tuesday, June 29th at 10:00 A.M. ET
INSPECTION: Monday, June 28th
from 9:00 A.M. – 4:00 P.M.

BID ONLINE AT
BidSpotter.com

ONLINE BIDDING ONLY!

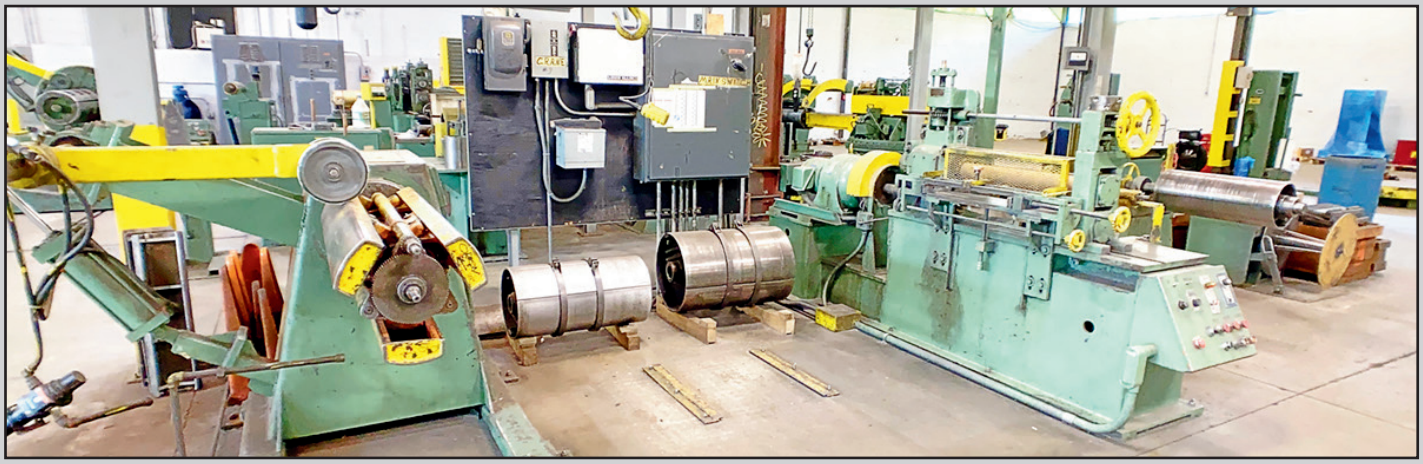

24" X 0.090" X 10,000-LB. WATERBURY FARREL PULL-THRU SLITTING LINE

UPTON CAR BOTTOM FURNACE

INDUSTRONICS CAR BOTTOM ANNEALING FURNACE

ANNEALING FURNACES

UPTON Car Bottom Annealing Furnace, nitrogen atmosphere, 6' x 6' x 12' deep ID, radiant tube natural gas, 1,100° F max. temp., digital temperature controls, with over temperature monitoring, 25,000-lb. capacity.

INDUSTRONICS Car Bottom Annealing Furnace, nitrogen atmosphere, 11' x 8' x 18' deep ID, radiant tube natural gas, 1,100° F max. temperature, 50,000-lb. capacity.

INDUSTRONICS Roll In Bed Annealing Furnace, nitrogen atmosphere, 40" x 62" x 28" ID, 37" x 21" door opening, 1,100° F max. temperature, radiant tube natural gas, digital temperature controls, 1,500-lb. capacity.

CINCINNATI PRECISION ROLL GRINDER

WILTON 7020 HORIZONTAL BAND SAW

AMERMAC 1100 STRIPPER RING LATHE

NATIONAL 58" X 1/4"MECHANICAL SHEAR

LANDIS HYDRAULIC OD GRINDER

2021 FREIGHTLINER BOX TRUCK, LIKE NEW

2020 FREIGHTLINER BOX TRUCK

MACHINE TOOLS

CINCINNATI Precision Roll Grinder, with Sine bar and Fanuc spindle drive, 16" swing x 48" between centers with cylinder fixtures.

LANDIS Hydraulic OD Grinder, 12" swing x 32" between centers with bar fixtures.

NATIONAL 58" x 1/4" Mechanical Soft Metal Shear.

WILTON 7020 Horizontal Metal Cutting Band Saw, 1.5 HP blade motor, 10" square cutting capacity, with 1" x .035" x 135" blade, coolant system.

AMERMAC 1100 Stripper Ring Lathe, 110 volt, 1-phase.

TRUCKS

2021 FREIGHTLINER Box Truck, 669.2 miles (LIKE NEW), Allison 3000 RDS automatic push button transmission, Cummins L9 270 HP engine, T/A (air lift pusher), dual rears, air ride, dual fuel tanks, white elite paint color, Morgan 24' box with roll-up door, 58,000 GVWR.

2020 FREIGHTLINER Box Truck, 45,623 miles, Eaton Fuller RT-8709B 9-speed transmission with HI/LO, Cummins L9 270 HP engine, T/A, dual rears, air ride, dual fuel tanks, heated mirrors, PW and PL, white elite paint color, Morgan 24' box with roll-up door, 58,000 GVWR.

DATE: Online Only Bidding Closes Tuesday, June 29th at 10:00 A.M. ET

INSPECTION: Monday, June 28th from 9:00 A.M. – 4:00 P.M.

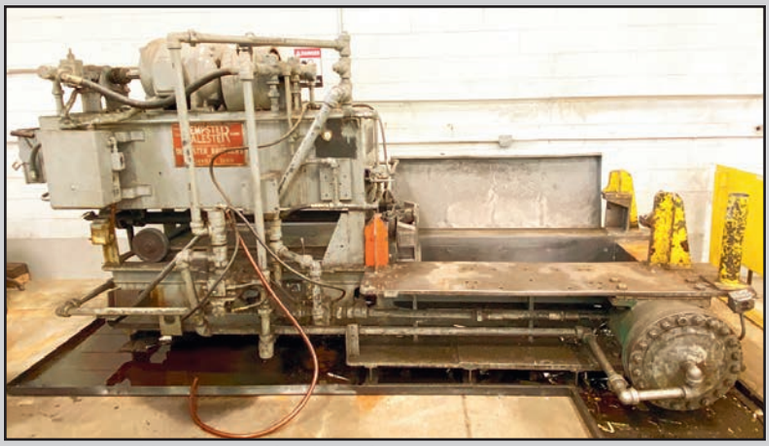

DEMPSTER BROS. HYDRAULIC METAL SCRAP BALER

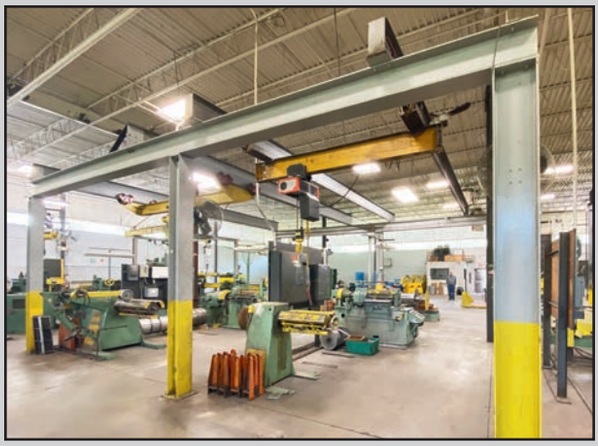

DOUBLE BAY 3-TON FREE STANDING BRIDGE CRANES

INGERSOLL RAND AIR COMPRESSOR WITH DRYER

TINIUS OLSEN 30,000-LB. DUCTILITY TESTER

MATERIAL HANDLING EQUIPMENT

2014 HYSTER S60FT Solid Tire LP Forklift, 5,800-lb. capacity, 181" mast with side shift, 6,400 hours.

RAYMOND 60-C50TT Stand Up Electric Forklift, 5,000-lb. capacity 178" mast, with coil lifting bar attachment.

DEMPSTER BROS. Hydraulic Metal Scrap Baler, 22" x 10" x 15" bale size, single and side ram.

STRIP LINE 12,000-Lb. Capacity Coil Upender.

(8) 5'–20' Jib Cranes, 1/2-ton–2-ton electric chain fall hoists.

Double Bay Floor Standing Bridge Crane, 28' wide x 24' long with Kone Crane 3-ton electric chain fall hoist, 108" span, 12' under hook, and Yale 3-ton electric chain fall hoist, 134" span 12' under hook.

Single Bay Floor Standing Bridge Crane, 94" wide x 22' long with Yale 3-ton electric chain fall hoist, 124" under hook.

Assorted BUSHMAN, ACCO, and CALDWELL 1/2-Ton–5-Ton Lifting Fixtures.

(12) Structural Steel Coil Cradles.

AIR COMPRESSORS

INGERSOLL RAND IRN 30H-CC HV 30 HP Rotary Screw Air Compressor, variable speed drive, with refrigerated air dryer, horizontal receiver.

INGERSOLL RAND SSR 40 HP Rotary Screw Air Compressor, with Zeks refrigerated air dryer.

LINER 5 HP Reciprocating Cylinder Air Compressor, with horizontal receiver.

DEWALT 3-Phase Portable Compressor, with vertical receiver.

INSPECTION & MEASUREMENT EQUIPMENT

TINIUS OLSEN Duct-O-Matic A-12 30,000-Lb. Ductility Tester, (1) standard bottom die and (1) upper die, (1) 0.875" diameter ball indenter, cup height dial indicator, (2) dial load indicators, full complement of tooling.

Assorted MITUTOYO and FOWLER Dial and Digital Snap Gauges to 6".

Assorted MITUTOYO and STARRETT Digital and Dial Calipers and Micrometers.

(2) METTLER TOLEDO Digital Floor Scales.

Good Selection of Power and Hand Tools, Strapping Carts with Tooling, Grinding Wheels, Parts, Supplies and Stores, Office and Shop Furniture, Fixtures, and Machines, and Much More!

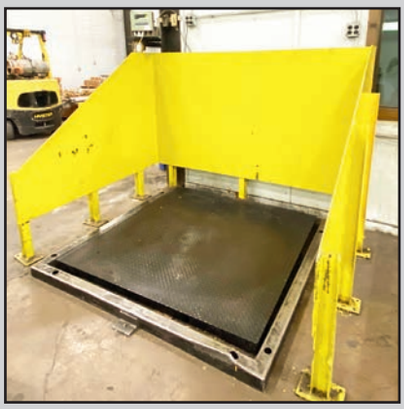

(1 OF 2) METTLER TOLEDO DIGITAL FLOOR SCALES

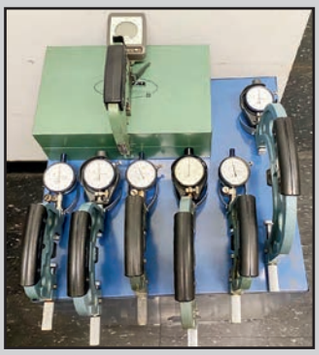

ASSORTED MITUTOYO AND FOWLER SNAP GAUGES

ASSORTED NEW GRINDING WHEELS

ASSORTED MICROMETERS AND CALIPERS

ONLINE BIDDING ONLY!

TERMS OF SALE: To be sold in accordance with CRG Terms of Sale as published on our website and in the auction catalog. A buyer's premium will apply.
All Covid-19 safety protocols, including mandatory masking and social distancing will be enforced.

MDNA Machinery Dealers National Association · NAA Auctioneer · IAA · ASA American Society of Appraisers

For complete catalog
crgllc.com 1.800.300.6852